



cadence™ 3

exponent™

part number 9860-707

POLE ASSEMBLY PARTS

Main Tent Poles

Part No. 9860-702

Side Poles


Part No. 9860-703

Rainfly


Part No. 9860-701

1 Layout & Positioning of Tent, Pole Assembly

- Layout and position tent with doors facing desired direction. (illus. 1)
- For best results in windy conditions, position door or back of tent into the wind.
- Stake down tent corners. Keep the floor taut. Unzip doors. (illus. 2)
- Assemble Frame Poles by interlocking the shock-corded sections. This will make two long poles and two shorter poles.
- Insert the longer poles through the pole sleeves. The center of the poles should cross forming an "X" in the middle of tent. (illus. 1)

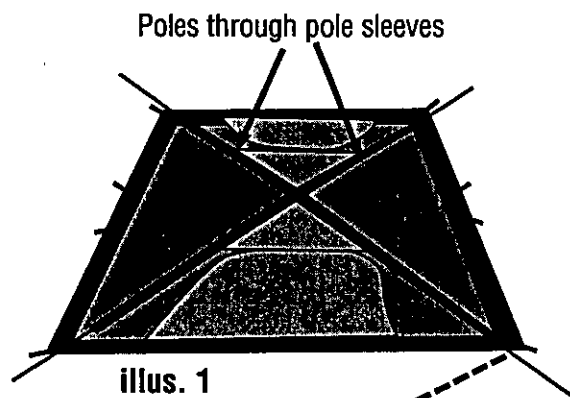

illus. 2
Tent stake through Loop




2 Connect Frame to Tent


- Insert one Pole Tip into the grommet on the webbing located at the corners of the tent. (illus. 4)
- Go to opposite end of the same pole and gradually apply pressure to the pole, forming an arch, until you are able to insert the pole tip into the grommet. (illus. 4)
- Repeat for second pole.
- Insert the shorter pole through the openings on the pole sleeves. (illus. 3)
- Insert Pole Tip of the side pole into the grommet on the webbing located on the side of the tent. The front pole goes toward the back. The rear pole angles toward the front. The Side poles will cross on each side.

Front Side Pole through pole sleeve openings

Back Side Pole through pole sleeve openings

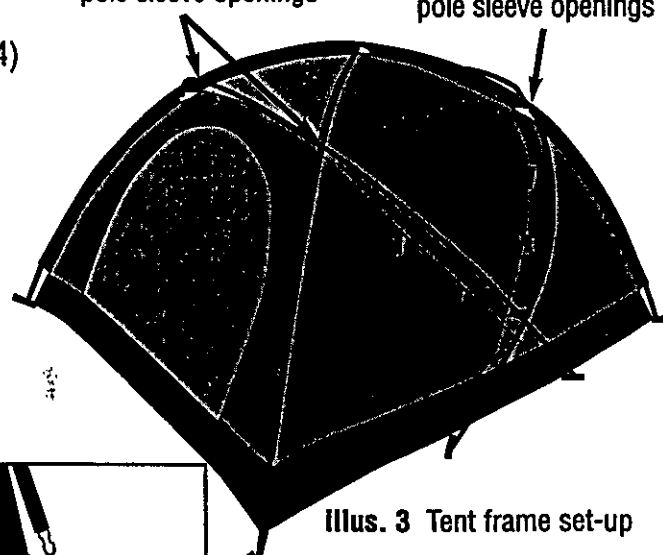


illus. 4
Insert Pole Tip into grommet




3 Attach Tent to Frame Using Frame Clips

- Attach remaining frame clips along the edges of tent to frame poles. (illus. 5, illus. 6)
- Make any adjustments to the tent corner stakes that are needed.

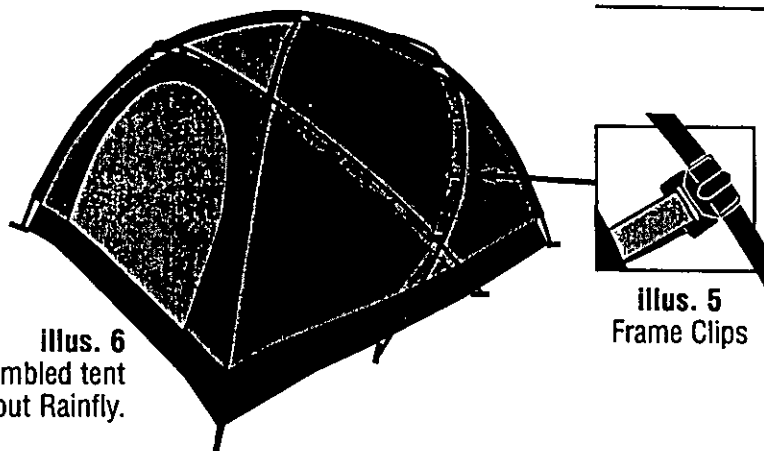

4 Attach Rainfly

- Drape Rainfly over tent frame, pole side down. The Curved door opening goes to the front. (illus 7, illus. 8)
- Secure Rainfly with Frame Ties located on underside of fly. (illus. 8)
- Connect the eight Rainfly clips to the clips located at the poles on the tent. (illus. 8, illus.9)
- Stake out the front and back of the Rainfly. (illus. 8)
- Attach Guy Lines to fabric loop at the corners of the Rainfly and stake out. (illus.8).

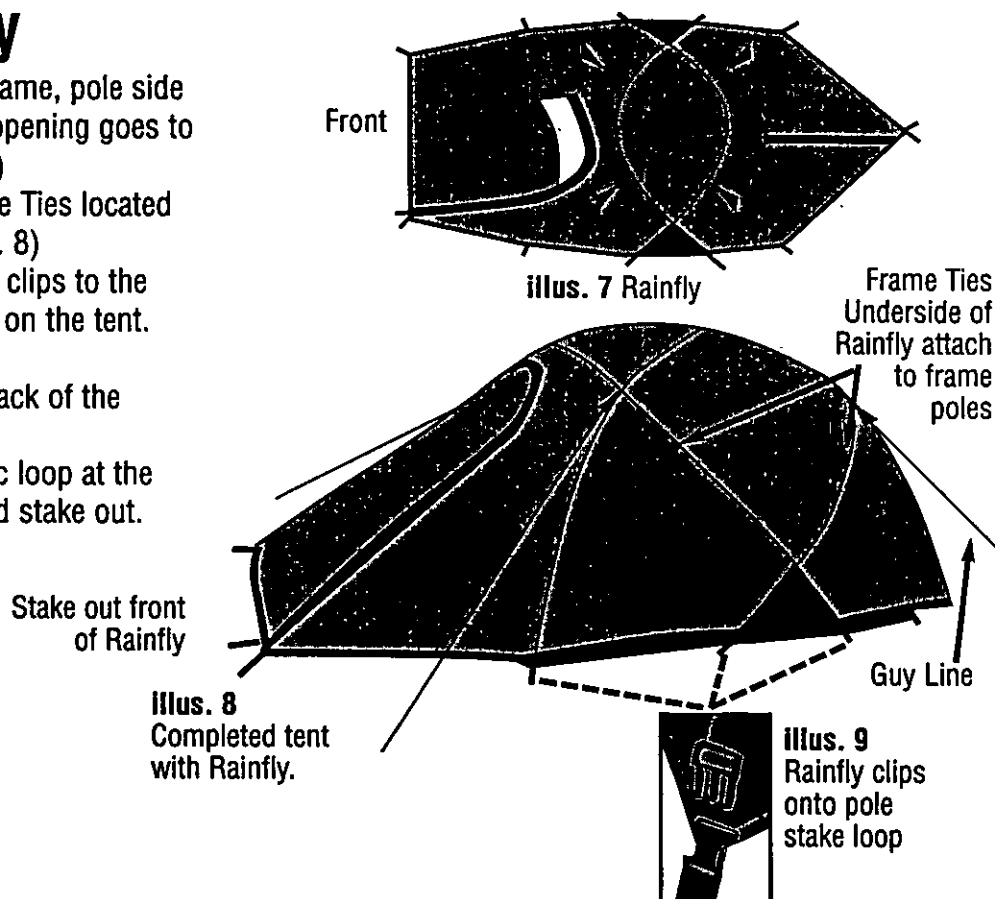

Things You Should Know

- Under certain conditions (cold weather, high humidity, etc.) condensation will form on the inside surfaces of your tent. Condensation is caused by water vapor from your breath, perspiration, or any wet clothing inside your tent. It is NOT LEAKAGE through the tent fabric. It can be minimized by removing wet clothing from your tent and by providing good ventilation through the tent.
- Seam sealer has not been provided with your tent. It is necessary and we recommend seam sealing your tent prior to camping. Seam sealer may be purchased through your local retailer or at your local sporting goods store.
- Never store tent, even for a short period of time, without drying it thoroughly and brushing off caked dirt. Do not pack stakes or poles inside your tent. Use separate storage bag.
- STAKES SHOULD BE REMOVED BY PULLING ON THE STAKE ITSELF. NEVER PULL ON THE TENT FABRIC OR TENT STAKE LOOP TO REMOVE STAKE.
- TENT POLES SHOULD NOT BE LEFT TELESKOPED TOGETHER DURING STORAGE.



exponent™

3600 N. Hydraulic • Wichita, Kansas 67219
1-800-835-3278 • www.coleman.com